

EUROCHAIN VL



**Electric chain hoist
for load from 60 up to 7 500 kg**



VERLINDE

LIFTING EQUIPMENT

EMMEGIESSE s.r.l.

Via Giovanni Falcone N° 8 41057 Spilamberto (MO) Italy
Tel 059/785979 Fax 059/785937 - www.emmegiesse.com - info@emmegiesse.com

New style, New concept

VERLINDE introduce the **EUROCHAIN VL**, a range of high-tech lifting units. Compact and in-line designed, the **EUROCHAIN VL** can suit any specific requirement : capacities from 60 to 7500 kg, 1 or 2 speed hoisting, manual or electric trolley with adjustable speed, height of lift, FEM group 1Bm or 2m.

EUROCHAIN VL is designed to provide users with maximum safety, and is fitted as standard with a torque limiter, a low voltage control, a hoisting disc brake and as option an upper and lower limit switch. The unit fully complies European Machinery Directive 98/37/CEE.

EUROCHAIN VL is available as :

- Hook suspended.
- Hooked or fitted onto a push or chain driven trolley.
- Fitted into Eurosistem trolley.
- Hooked or fitted into a motor-driven trolley.

In addition many optional features are available.



EUROCHAIN VL
is available in 7 models :

VL1 from 60 to 250 kg

VL2 from 125 to 500 kg

VL5 from 250 to 1000 kg

VL10 from 500 to 2000 kg

VL16 from 1000 to 3200 kg

VL20 from 1600 to 6300 kg

VL25 from 1600 to 7500 kg

EUROCHAIN

VL
Electric chain hoist for load from 60 up to 7 500 kg
CUSTOMISED INSTALLATIONS

Hook suspended.

These hoists are not equipped with a trolley and are used in applications where horizontal displacement is not required.


Hooked or fitted onto a push or chain driven trolley.

These hoists for load up to 7 500 kg are equipped with a trolley and are used in applications where horizontal movement is required.


Hooked or fitted into a motor-driven trolley.

These hoists for load up to 7 500 kg are fitted with a trolley and are used in applications where horizontal movement is required.


Fitted into Eurosistem trolley.

These hoists are fitted with a manually-operated or electric trolley and are used for horizontal movements along tracks such as the Eurosistem type.


Fitted into a motor-driven short headroom trolley.

These hoists for load up to 5 000 kg are fitted with a trolley and are used in applications where horizontal movement is required with a maximum height of lift.


Fitted into a motor-driven boogie trolley.

These hoists for load up to 5 000 kg are fitted with a trolley and are used in applications where horizontal movement is required on curved track.

Gear box



Improved hoist compactness. Low noise level while in use thanks to pinions lubricated with plenty of grease and its rectified and treated straight teeth.

Load wheel



5 or 6 pockets (depending on model), treated and rectified, machined in a single operation.

Hoist body



Made with moulded injected aluminium, making the hoist lighter, the fins on the motor section provide good thermal exchange. The chassis is painted with one coat of 2-component epoxy paint with 80 microns that is highly resistant to corrosive agents.

Safety

Friction torque limiter. It guarantees use of the hoist without overload.

Lifting hook. Rotating hook made with special steel, conforming to DIN standards, with a safety latch.

Limit switch. Electric limit switch for upper and lower limits, providing safe operation of the hoist (provided as a standard feature on VL 16, 20 and 25).

Push button box. Very low voltage command, 48 Volts, emergency stop (large button).



Savings

Disk brake. Electro-magnetic, brake linings tested for longevity of the hoist within its use group.

Load limiter. As a standard, all EUROCHAIN VLs are equipped with a torque limiter (Safety feature to prevent hoist) For greater longevity.

Treated surface. Two-component epoxy paint with 80 microns for better protection against corrosive agents

Ergonomics

Push button box. Water-proof, IP 65 protection, with 2, 4 or 6 buttons.

Electrical cubicle. Located on the side of the hoist, easy to access.

New
technology

CHAIN VL

Load from 60 up to 7 500 kg



High safety

High technology

Chain guide. Ensures perfect positioning of the chain around load wheel.

Electrical cubicle. Very spacious, and equipped as a standard with an electric plate that can be fitted with an optional an hour time counter, etc...

Hoisting motor. Optional mono-phase version available.

Load wheel. With 5 or 6 pockets for better distribution of the load.

BGV C1 (VGB 70). Optional BGV C1 version available.

Easy maintenance

Hoisting motor. 1 or 2 speeds, speed ratio: HS /LS 1/4 power of the motors with 0,2/0,5 to 3,5/0,9 kW, F insulation class, IP 55 protection. The motor is cooled by means of thermal exchange.

Lifting chain. Zinc coated and calibrated, with high tensile strength, treated (800 N/mm^2). Special chains available as option: reduced lubrication chain, stainless chain, ...)

Disk brake



Electro-magnetic type with linings material for hoist FEM groups lifetime, designed for easy to access and simple adjustment.

Chain bag



Moulded, steel or made out fabric, adapted to lifting height (several capacities).

Electric control panel



Quite large, built into the piece of equipment, it contains all of the component (plate, connectors, transformer, etc.) and is easy to access for maintenance purposes, IP55 protection.

EUROCHAIN VL


Electric chain hoist for load from 60 up to 7 500 kg

Technical characteristics

S.W.L. (kg)	HOIST type	F.E.M.	Lifting speeds (m/min)	Number of falls	Hoisting motor power (kW)	Fix hook susp. unit	Monorail trolley unit				Chain 800 N/mm ²	
							Manual travelling		Motorized travelling			
							push trolley unit	chain trolley unit	One speed	Two speed	Variable speed	
60	VL1 0616 b1	1Bm	16 / 4	1	0,2/0,05	•	•	•	•	•	–	3,1 x 9,3
	VL1 068 b2	2m	8 / 2	1	0,2/0,05	•	•	•	•	•	–	3,1 x 9,3
80	VL1 088 b2	2m	8 / 2	1	0,2/0,05	•	•	•	•	•	–	3,1 x 9,3
125	VL1 128 b1	1Bm	8 / 2	1	0,2/0,05	•	•	•	•	•	–	3,1 x 9,3
	VL1 124 b2	2m	4 / 1	2	0,2/0,05	•	•	•	•	•	–	3,1 x 9,3
	VL2 124 m2	2m	4	1	0,4	•	•	•	•	•	•	4,8 x 12,7
	VL2 128 m2	2m	8	1	0,4	•	•	•	•	•	•	4,8 x 12,7
	VL2 128 b2	2m	8 / 2	1	0,4/0,1	•	•	•	•	•	•	4,8 x 12,7
250	VL1 254 b1	1Bm	4 / 1	2	0,2/0,05	•	•	•	•	•	•	3 x 9
	VL2 254 m1	1Bm	4	1	0,4	•	•	•	•	•	•	4,8 x 12,7
	VL2 258 m1	1Bm	8	1	0,4	•	•	•	•	•	•	4,8 x 12,7
	VL2 258 b1	1Bm	8 / 2	1	0,4/0,1	•	•	•	•	•	•	4,8 x 12,7
	VL5 2516 b1	1Bm	16 / 4	1	0,8/0,2	•	•	•	•	•	•	4,8 x 12,7
	VL5 254 b2	2m	4 / 1	2	0,4/0,1	•	•	•	•	•	•	4,8 x 12,7
	VL5 254 m2	2m	4	1	0,4	•	•	•	•	•	•	4,8 x 12,7
	VL5 258 m2	2m	8	1	0,8	•	•	•	•	•	•	4,8 x 12,7
	VL5 258 b2	2m	8 / 2	1	0,8/0,2	•	•	•	•	•	•	4,8 x 12,7
500	VL2 504 m1	1Bm	4	2	0,4	•	•	•	•	•	•	4,8 x 12,7
	VL5 504 m1	1Bm	4	1	0,4	•	•	•	•	•	•	4,8 x 12,7
	VL2 504 b1	1Bm	4 / 1	2	0,4/0,1	•	•	•	•	•	•	4,8 x 12,7
	VL5 508 m1	1Bm	8	1	0,8	•	•	•	•	•	•	4,8 x 12,7
	VL5 508 b1	1Bm	8 / 2	1	0,8/0,2	•	•	•	•	•	•	4,8 x 12,7
	VL10 5016 b1	1Bm	16 / 4	1	1,7/0,4	•	•	•	•	•	•	6,8 x 17,8
	VL5 502 m2	2m	2	2	0,4	•	•	•	•	•	•	4,8 x 12,7
	VL5 504 m2	2m	4	2	0,8	•	•	•	•	•	•	4,8 x 12,7
	VL5 504 b2	2m	4 / 1	2	0,8/0,2	•	•	•	•	•	•	4,8 x 12,7
	VL10 504 m2	2m	4	1	0,8	•	•	•	•	•	•	6,8 x 17,8
	VL10 508 m2	2m	8	1	1,7/0,4	•	•	•	•	•	•	6,8 x 17,8
1000	VL10 508 b2	2m	8 / 2	1	1,7/0,4	•	•	•	•	•	•	6,8 x 17,8
	VL5 1002 m1	1Bm	2	2	0,8	•	•	•	•	•	•	4,8 x 12,7
	VL5 1004 m1	1Bm	4	2	0,8	•	•	•	•	•	•	4,8 x 12,7
	VL5 1004 b1	1Bm	4 / 1	2	0,8/0,2	•	•	•	•	•	•	4,8 x 12,7
	VL10 1004 m1	1Bm	4	1	0,8	•	•	•	•	•	•	6,8 x 17,8
	VL10 1008 m1	1Bm	8	1	1,7	•	•	•	•	•	•	6,8 x 17,8
	VL10 1004 m2	2m	4	2	1,7	•	•	•	•	•	•	6,8 x 17,8
	VL10 1008 b1	1Bm	8 / 2	1	1,7/0,4	•	•	•	•	•	•	6,8 x 17,8
	VL10 1004 b2	2m	4 / 1	2	1,7/0,4	•	•	•	•	•	•	6,8 x 17,8
1600	VL16 1008 b2	2m	8 / 2	1	3,5/0,9	•	•	–	–	–	•	9 x 27
	VL10 1602 m1	1Bm	2	2	0,8	•	•	•	•	•	•	6,8 x 17,8
	VL10 1604 m1	1Bm	4	2	1,7	•	•	•	•	•	•	6,8 x 17,8
	VL10 1604 b1	1Bm	4 / 1	2	1,7/0,4	•	•	•	•	•	•	6,8 x 17,8
	VL16 1608 b1	1Bm	8 / 2	1	3,5/0,9	•	•	–	–	–	•	9 x 27
2000	VL25 1606 b2	2m	6,3 / 1,6	1	3,5/0,9	•	•	–	–	–	•	11,3 x 31
	VL10 2002 m1	1Bm	2	2	0,8	•	•	•	•	•	•	6,8 x 17,8
	VL10 2004 m1	1Bm	4	2	1,7	•	•	•	•	•	•	6,8 x 17,8
	VL10 2004 b1	1Bm	4 / 1	2	1,7/0,4	•	•	•	•	•	•	6,8 x 17,8
	VL16 2004 b2	2m	4 / 1	2	3,5/0,9	•	•	–	–	–	•	9 x 27
2500	VL16 2504 b1	1Bm	4 / 1	2	3,5/0,9	•	•	–	–	–	•	9 x 27
	VL20 2504 b2	2m	4 / 1	2	3,5/0,9	•	•	–	–	–	•	11,3 x 31
	VL25 2506 b1	1Bm	6,3 / 1,6	1	3,5/0,9	•	•	–	–	–	•	11,3 x 31
3200	VL16 3204 b1	1Bm	4 / 1	2	2,5/0,64	•	•	–	–	–	•	9 x 27
4000	VL20 4004 b1	1Bm	4 / 1	2	3,5/0,9	•	•	–	–	–	•	11,3 x 31
5000	VL20 4002 b1	2m	2,7 / 0,7	3	3,5/0,9	•	•	–	–	–	•	11,3 x 31
6000	VL25 5003 b1	1Bm	3,2 / 0,75	2	3,5/0,9	•	•	–	–	–	•	11,3 x 31
7500	VL20 6302 b1	1Bm	2,7 / 0,7	3	3,5/0,9	•	•	–	–	–	•	11,3 x 31
	VL25 7502 b1	1Bm	2,1 / 0,5	3	3,5/0,9	•	•	–	–	–	•	11,3 x 31


• : Available in this version – : Not available in this version

Load Range

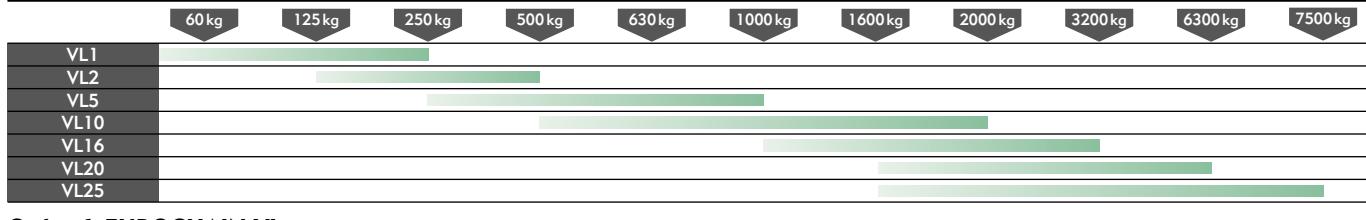

Code of EUROCHAIN VL

VL5	250	8	b	2
Hoist body type	Load/10	Lifting speed	2-speed	FEM Group 1 = 1 Bm, 2 = 2

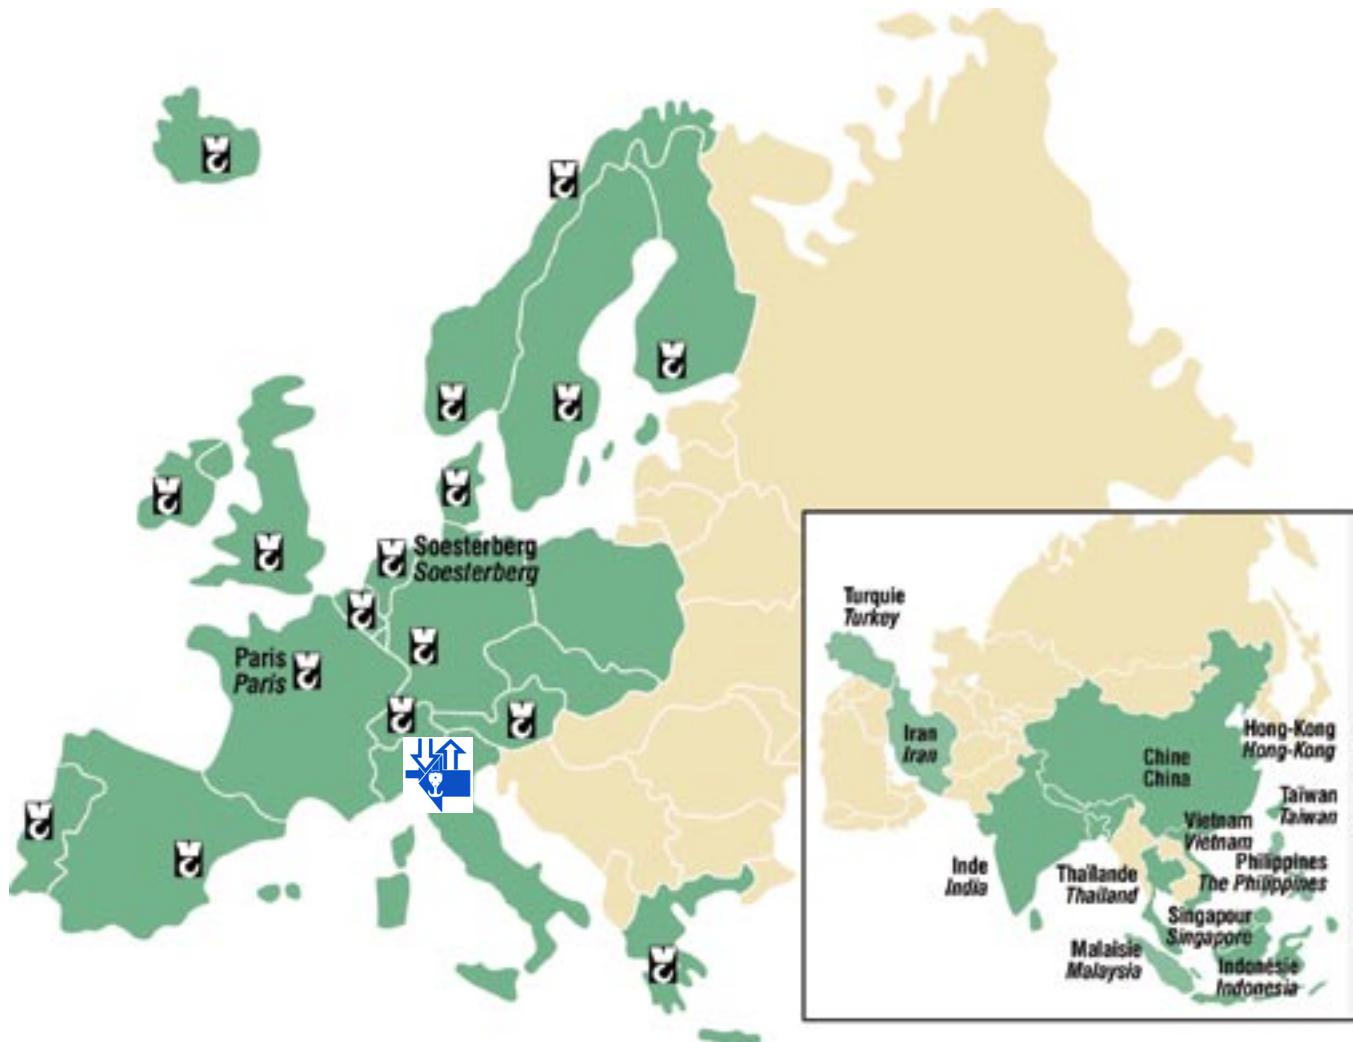

VERLINDE is:

- The leading French constructor and exporter of hoisting and mechanical handling equipment.
 - A group employing 5,000 staff.
 - A large range hoisting equipment from 60 to 100.000 kg
 - ISO 9001 quality control certified.
 - Easily-accessible consultants in over 80 countries.



In France

9 Sales offices, 14 after sale service centres, 11 manufacturing plants for EUROPONT travelling cranes and a national distribution network.

World-wide

Branches in Germany, Holland, Belgium, Italy and distributors in Germany, Spain, Italia, Argentina, Austria, Brazil, Chilli, Ireland, United Kingdom, Sweden, Norway, Denmark, China, Thailand, Indonesia, Malaysia, United States, etc.



Via Giovanni Falcone N° 8 41057 Spilamberto (MO) Italy
Tel 059/785979 Fax 059/785937 - www.emmeqiesse.com - info@emmeqiesse.com